


marelli

DOLLARO

LIVING COLOUR PALETTE

marelli

COLOUR PALETTE

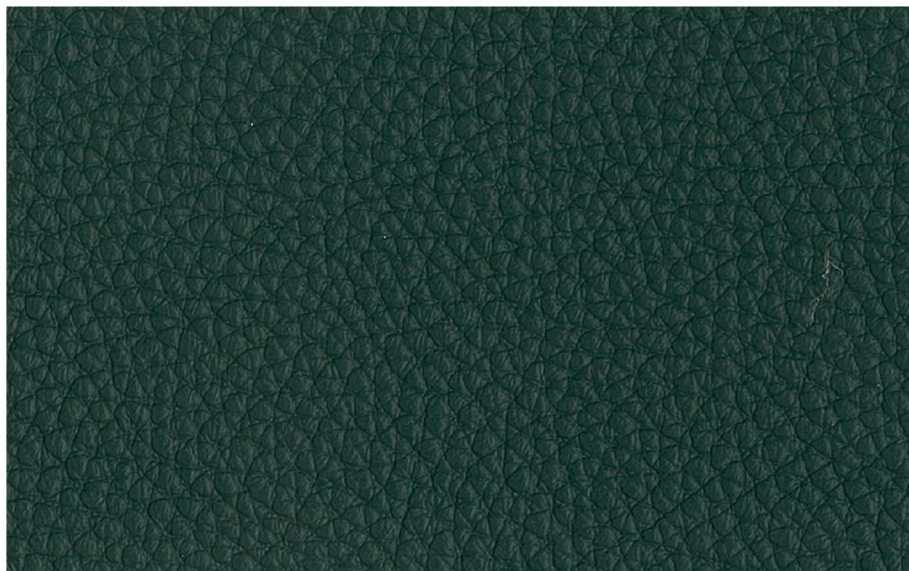


7280 DOLLARO




7757 DOLLARO




7290 DOLLARO




7170 DOLLARO




7300 DOLLARO



7310 DOLLARO



7120 DOLLARO



7130 DOLLARO



7160 DOLLARO



7750 DOLLARO



7200 DOLLARO



7735 DOLLARO



7766 DOLLARO



7761 DOLLARO



7734 DOLLARO



7000 DOLLARO



7040 DOLLARO



7220 DOLLARO




7230 DOLLARO




7050 DOLLARO



7090 DOLLARO



7100 DOLLARO



7759 DOLLARO




7070 DOLLARO



7150 DOLLARO



7763 DOLLARO



7733 DOLLARO



7736 DOLLARO



7210 DOLLARO



7010 DOLLARO



7732 DOLLARO



7767 DOLLARO



7020 DOLLARO



7764 DOLLARO



7744 DOLLARO




7250 DOLLARO



7748 DOLLARO



7260 DOLLARO



7060 DOLLARO



7270 DOLLARO



7140 DOLLARO



7240 DOLLARO



7030 DOLLARO




7080 DOLLARO



7739 DOLLARO



7738 DOLLARO



7737 DOLLARO



7110 DOLLARO

ART. **DOLLARO** CAT. **SUPER** LEATHER

Chrome tanned bovine row hides - Pigmented - Corrected grain - Through-dyeing aniline
Thickness 1.4 - 1.6 mm

PROPERTY	TEST METHOD	PERFORMANCE
COLOR FASTNESS		
Dry rub fastness - 500 cycles:	EN ISO 11640	≥4 Grey Scale
Wet rub fastness - 250 cycles:	EN ISO 11640	≥3/4 Grey Scale
Artificial solution rub fastness - 80 cycles:	EN ISO 11640 / EN ISO 11641	≥3/4 Grey Scale
Fastness to light:	EN ISO 105-B02 (Met.3)	≥5 Blue Scale

PHYSICAL CHARACTERISTICS


Adhesion of finish dry:	EN ISO 11644	≥ 2 N/10mm
Tear strength:	EN ISO 3377-1	≥ 20 N
Flex resistance - 50.000 cycles:	EN ISO 5402	No cracks

FLAMMABILITY

Flammability tests:	EN 1021-1, EN 1021-2, B55852: Source 0, B55852: Source 1, Cal TB117, NFPA 260/UFAC
---------------------	---

Our leather is processed in conformity with REACH regulation

CLEANING AND MAINTENANCE

-  Avoid placing leather in direct sun cloth and mild soap
-  Spots can be cleaned with a lightly damp
-  Keep the leather away from direct heat
-  Dry immediately after treatment
-  Dust regularly with a soft and dry cloth
-  Do not rub. Use a light circular motion working toward the center of the stain

SISTEM CERTIFICATIONS



OHSAS 18001-2007 ISO 14001-2015 ISO 9001-2015 IATF 16949-2016

PRODUCT CERTIFICATIONS



UNI 11239 ISO 14025 ISO 14067/CO2 RAL-UZ 148 RAL-GZ 430