


VESCOM

FABRIC
ART. DIKSON
CAT. D-E


mare

HOME & CONTRACT


FABRIC
SAMPLES

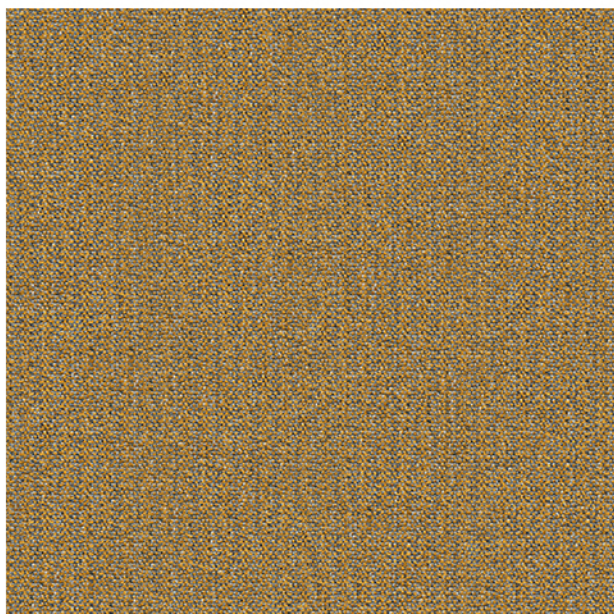


DIKSON
7063.01

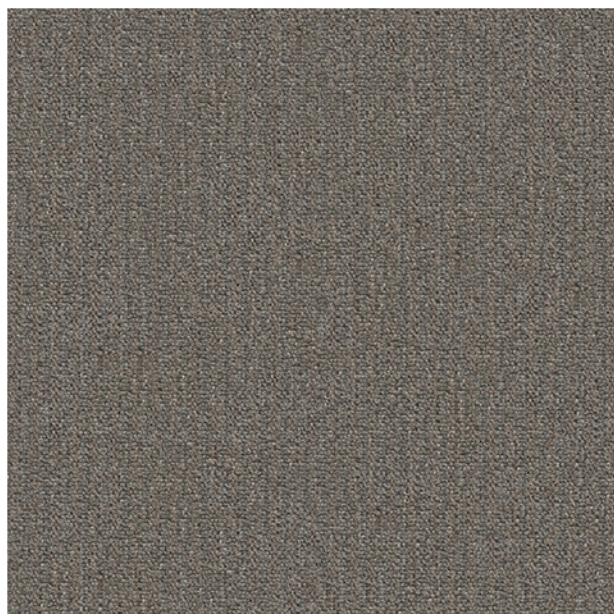


DIKSON
7063.02

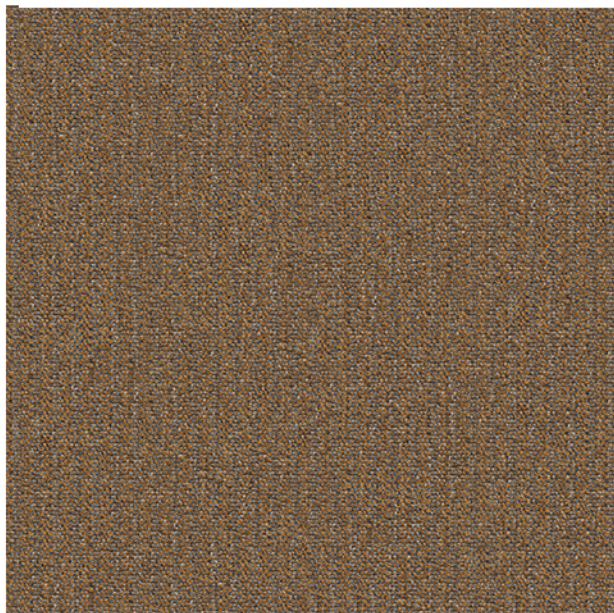


DIKSON
7063.03

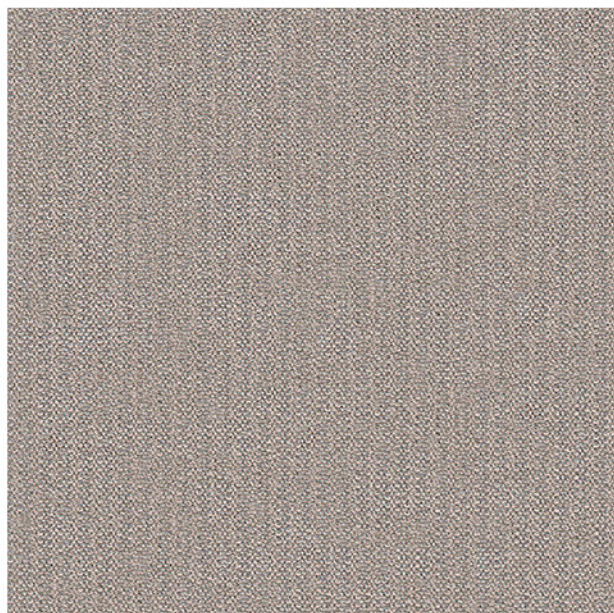


DIKSON
7063.04

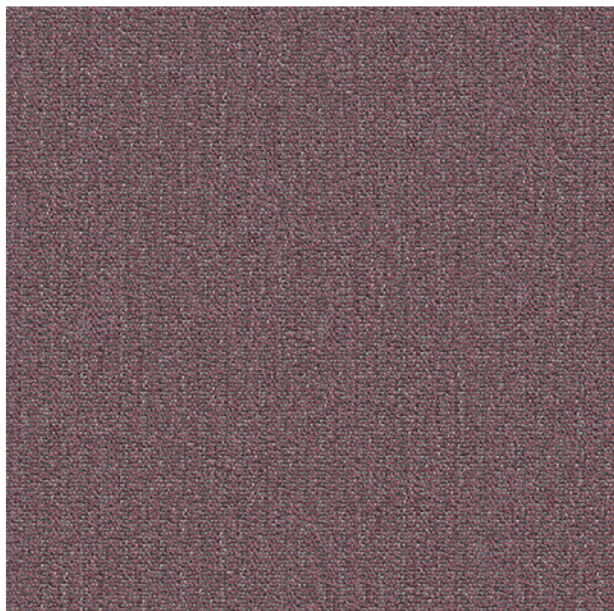


DIKSON
7063.05

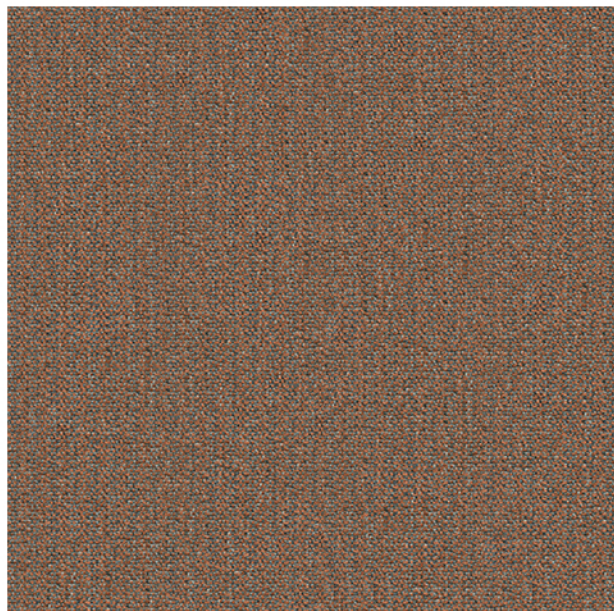


DIKSON
7063.06

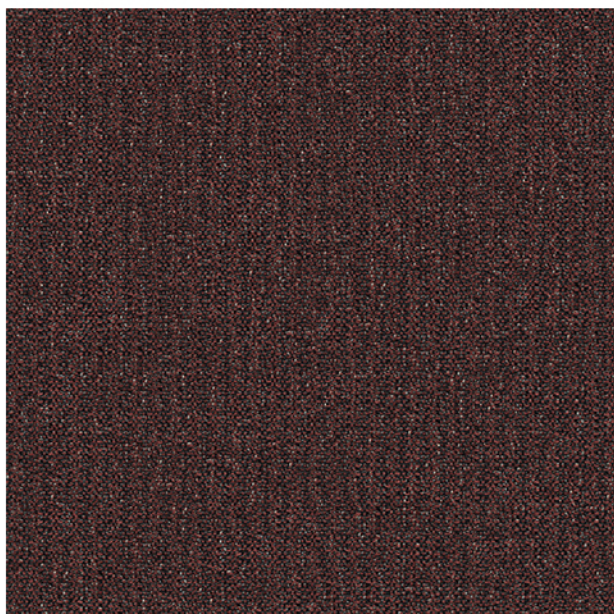


DIKSON
7063.07

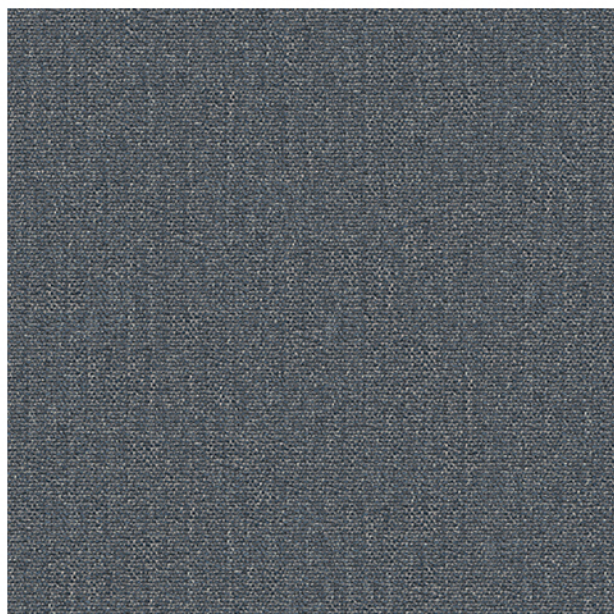


DIKSON
7063.08

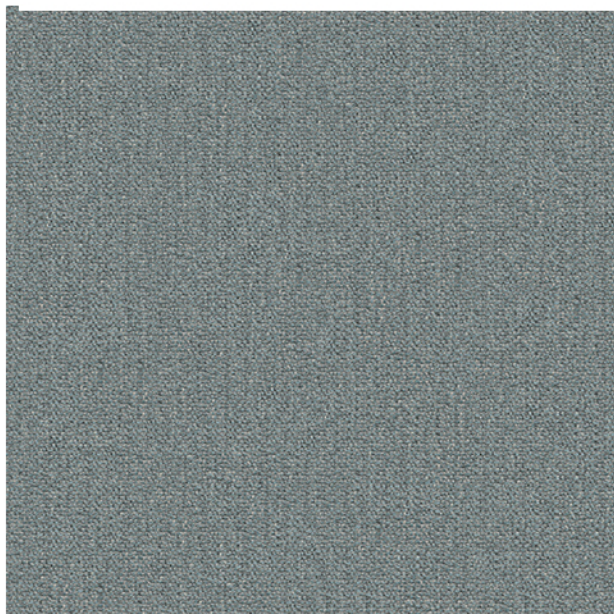


DIKSON
7063.09

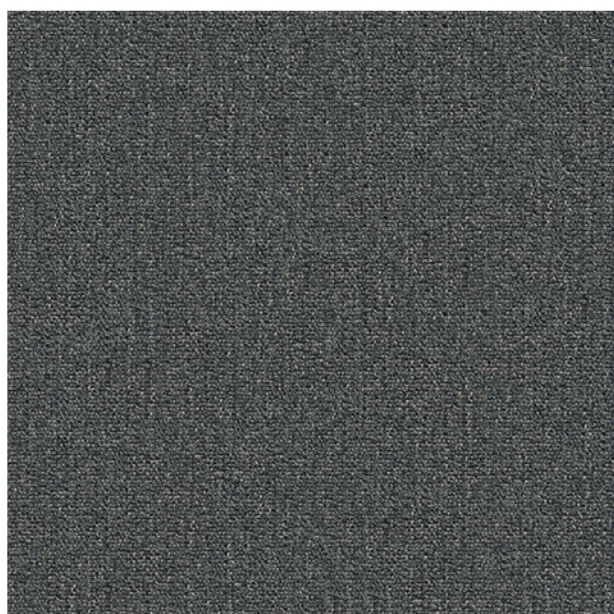


DIKSON
7063.10

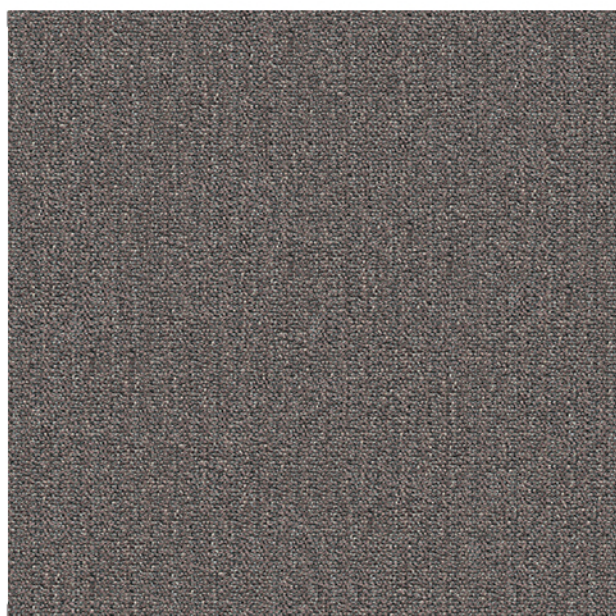


DIKSON
7063.11

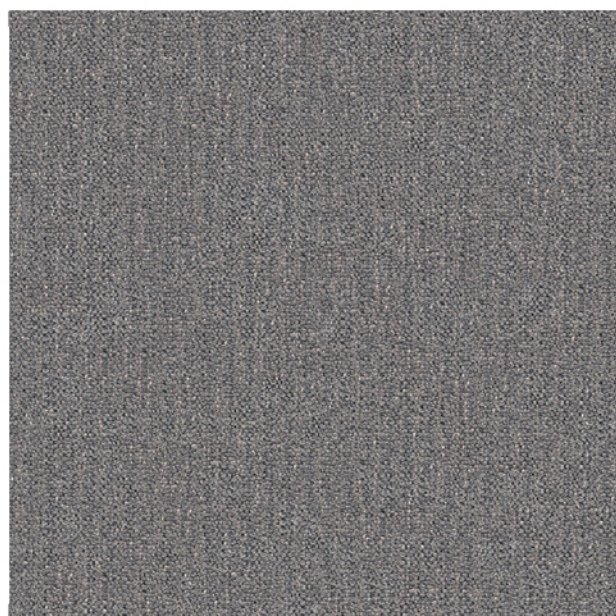

DIKSON
7063.12

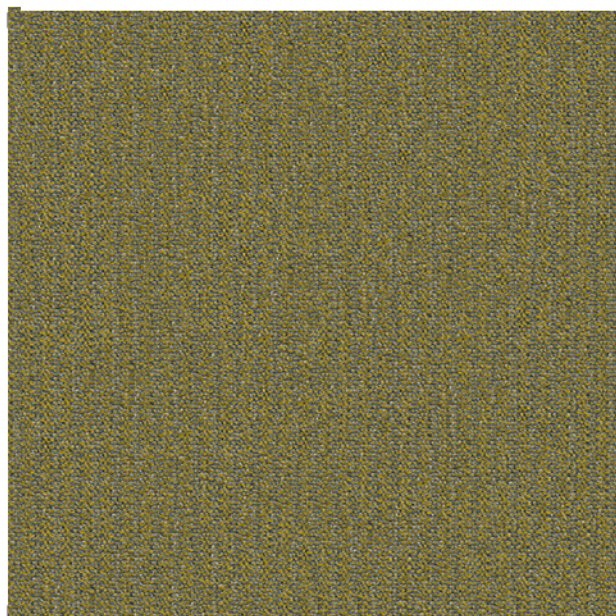

DIKSON
7063.13

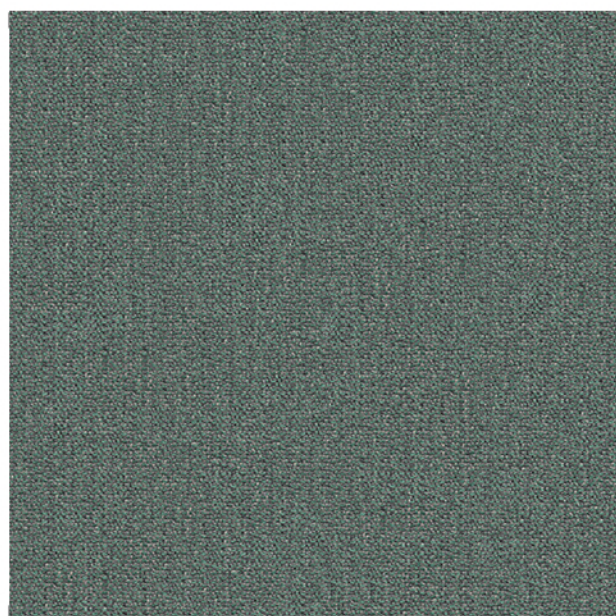

DIKSON
7063.14

VESCOM

FABRIC
ART. **DIKSON**
CAT. **D-E**

COMPOSITION: > 40% RECYCLED PL FR / < 60% PL FR
WIDTH: 140 CM
WEIGHT: 819 GR/M¹
ABRASION RESISTANCE: 100.000 RUBS MARTINDALE ISO 12947-2
100.000 DOUBLE RUBS WYZENBEEK
ASTM D3597/D4157 (#10 cotton duck)
PILLING RESISTANCE: 4 - 5 (SCALE 1-5) ISO 12945-2
5 (SCALE 1-5) ASTM D3511
LIGHT FASTNESS: 6 (SCALE 1-8) ISO 105 B02
4.5 (SCALE 1-5) AATCC 16.2 OPT.1 OR 16.3 OPT. 3
FASTNESS TO RUBBING: WET 4 - 5 (SCALE 1-5) / DRY 4 - 5 (SCALE 1-5) ISO 105 X12
WET 4 (SCALE 1-5) / DRY 4 (SCALE 1-5) AATCC 8
SEAM CUT RESISTANCE: WARP 2 MM / WEFT 2 MM ISO 13936-2
WARP 89 LBS / WEFT 96 LBS ASTM D4034
TENSILE STRENGTH: WARP 2500 N / WEFT 1550 N ISO 13934-1
WARP 474 LBS / WEFT 262 LBS ASTM D5034
FIRE RESISTANCE: EN 1021/1-2, PASS
BS 5852, CRIB 5
NF P 92/503-507 OR NF D 60-013, M1
DIN 4102, B1
CAL TB 117-2013, SECTION 1, PASS
IMO 2010 FTP PART 8, PASS
NFPA 260, CLASS 1

CARE:



NARROWING:

SHRINKAGE 30° - WARP -2.6%
SHRINKAGE 30° - WEFT -1.9%



STANDARD
100
S07-0023
Hohenstein HTTI

marelli
HOME & CONTRACT

Giulio Marelli Italia SpA

Via Indipendenza 159 20821 Meda (MB) Italia T ++39 0362 342116
info@giuliomarelli.com www.giuliomarelli.com