

**marelli**  
HOME & CONTRACT

FABRIC  
ART. **ORSETTO**  
CAT. **F-G**

**marelli**

HOME & CONTRACT

---

FABRIC  
SAMPLES

---





ORSETTO  
01/1



ORSETTO  
01/2




ORSETTO  
05/10




ORSETTO  
07/11



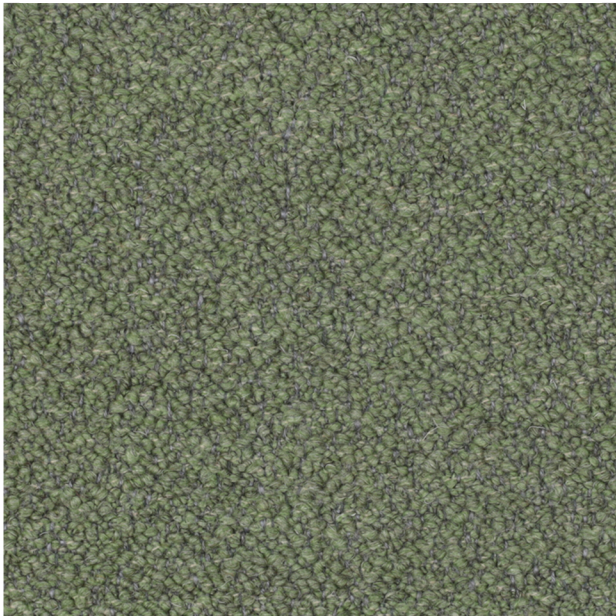


ORSETTO  
02/26

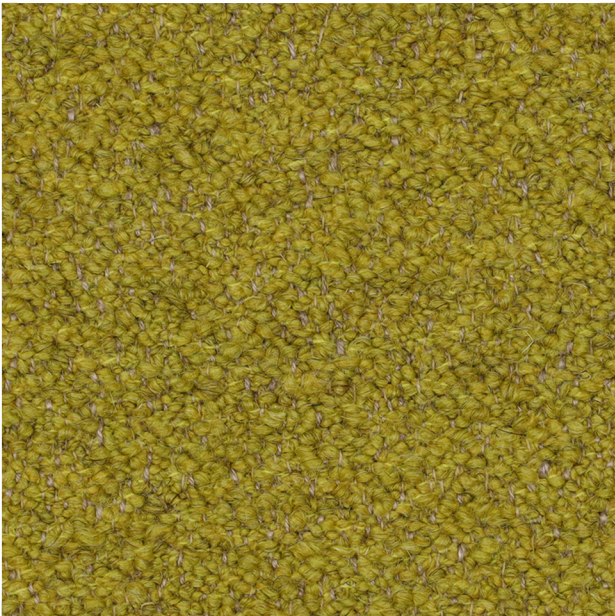

ORSETTO  
05/9




ORSETTO  
05/6

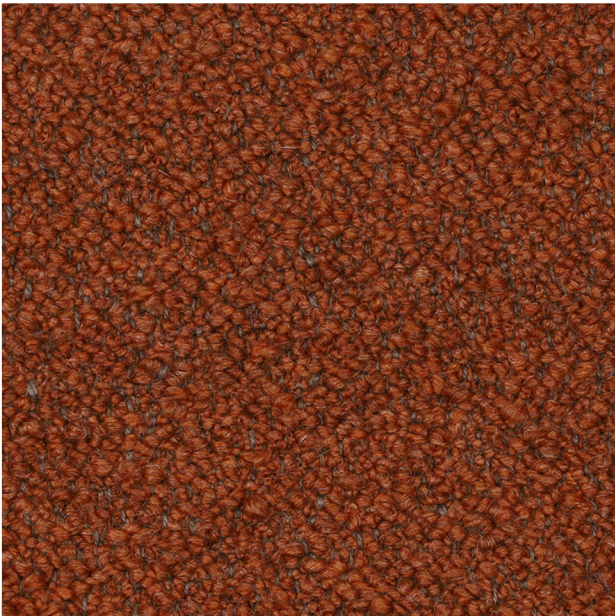

ORSETTO  
07/24




ORSETTO  
98/16

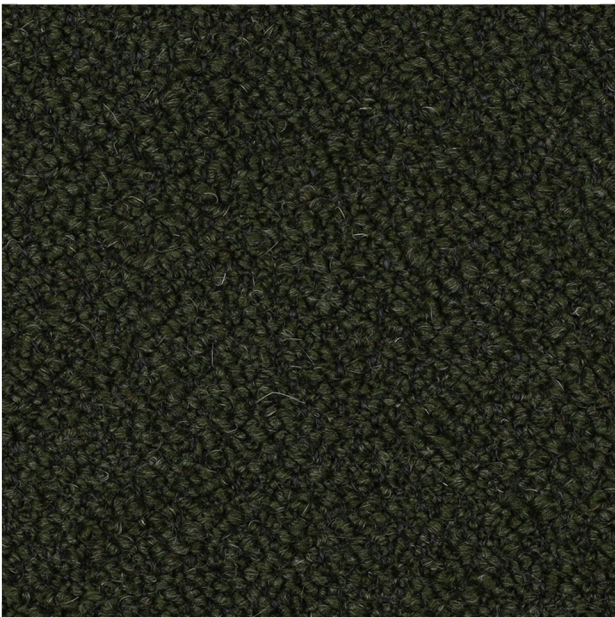

ORSETTO  
98/18



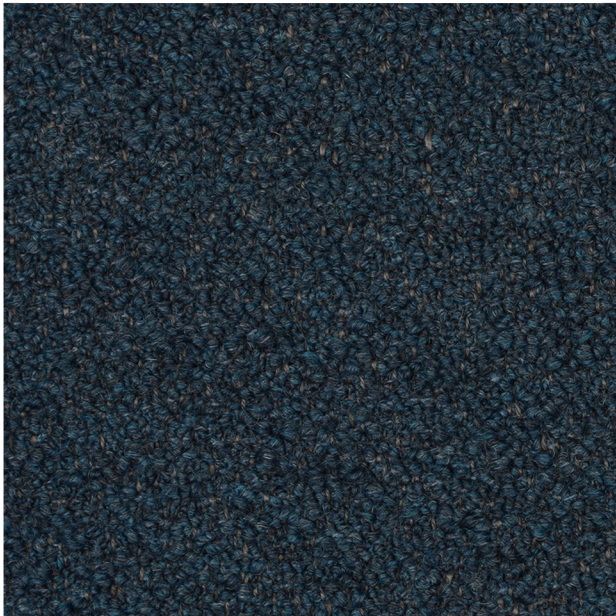

ORSETTO  
09/23



ORSETTO  
98/20




ORSETTO  
98/21



ORSETTO  
09/12



ORSETTO  
02/22

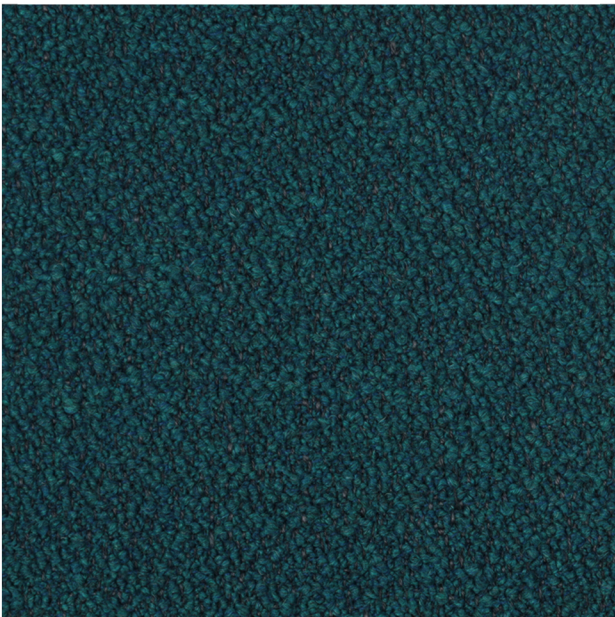

ORSETTO  
98/125



FABRIC  
ART. **ORSETTO**  
**CAT. F-G**

|                      |                                                                                                                                                           |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| COMPOSITION:         | 34% VI 33% PC 17% WO 8% PL 4% LI 4% CO                                                                                                                    |
| WIDTH:               | APP.140 CM                                                                                                                                                |
| WEIGHT:              | 940 G / M <sup>2</sup> (+/- 5%)                                                                                                                           |
| ABRASION RESISTANCE: | 80000 MARTINDALE CYCLES (EN ISO 12947-2)                                                                                                                  |
| PILLING:             | 5 (EN ISO 12945-2)                                                                                                                                        |
| LIGHT FASTNESS:      | 5 (EN ISO 105-B02)                                                                                                                                        |
| FASTNESS TO RUBBING: | WET 4 ; DRY 5 (EN ISO 105- X12)                                                                                                                           |
| FLAMMABILITY:        | BS 5852 PART 0-1 ( C&M)<br>CALIFORNIA TB 117:2013<br>EN 1021.1&2 ( C&M)<br>BS 5852-CRIB5 (WITH COATING)<br>NFPA 260UNI 9175<br>CLASSE 1.IM (WITH COATING) |

## CARE



DO NOT WASH  
DO NOT BLEACH  
IRON AT LOW TEMPERATURE  
GENTLE CLEANING WITH PCE  
DO NOT TUMBLE DRY  
DRY-CLEANING  
PLEASE SEE THE ISO SYMBOLS