


COMFORT+


COLOUR 8580-66002

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

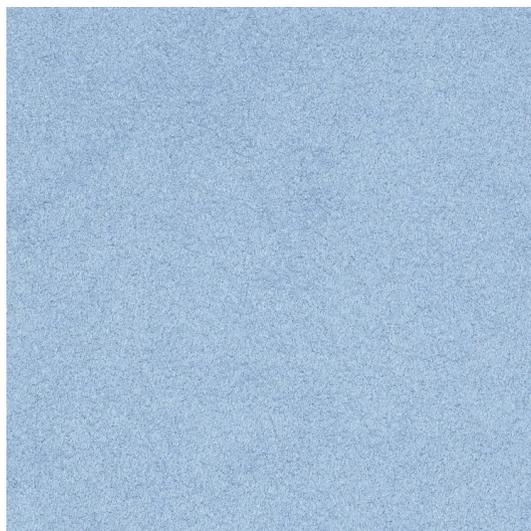

COLOUR SCALE

Design no. 8580 Comfort+ (140 cm/55") is available in 77 colours

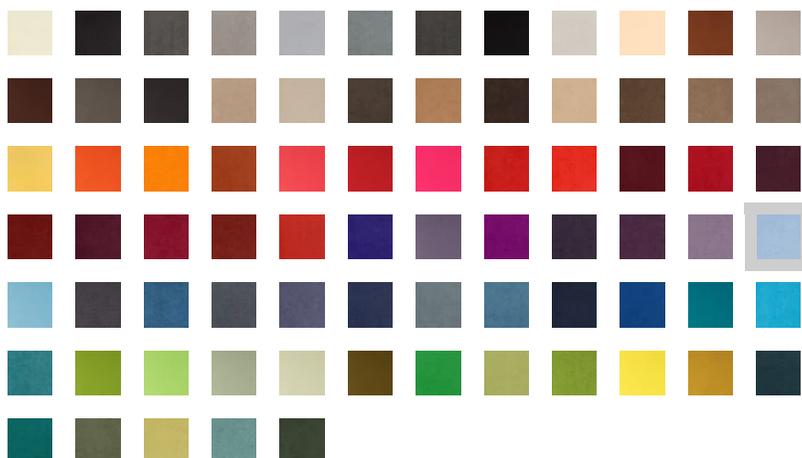

Comfort+ is an extremely versatile and durable microfiber upholstery fabric. It is antistatic, fire-resistant and stains are removed with ease. It is machine washable and can even be disinfected with ethanol. Moreover, it is environmentally-friendly, dimensionally stable, breathable and soft – and retains its appearance year after year. Properties that make Comfort+ an All-terrain fabric.

Meets Möbelfakta requirements

Designed by: Gabriel Design Team

Colours designed by: Cenk Kivrikoglu



PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.

8580 – Comfort+

Application

Upholstery



PERFORMANCE

Abrasion

150,000 – rubs martindale (EN ISO 12947-2)

Pilling

5 – scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

51% Polyester, 37% Post-consumer rec.pes., 12% Polyurethane incl. antistatic fibers and fire retardant fibers in the backside

Weight

385 g/lm – 12.42 oz/lin.yd

Width

140 cm – 55 inches

ENVIRONMENT

Environment, health, and safety

OEKO-TEX® STANDARD 100

Meets Möbelfakta requirements

VOC emission

Ansi/Bifma VOC test M7.1

5-7 – scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4/4-5 – scale 1-5, max. 5 (EN ISO 105x12)

Flammability

BS EN 1021 1&2 Cigarette and Match

BS EN 1021-1 Cigarette

ÖNORM A3800-B2-B3825-Q1 UK

NF P 92-503 M3

CA TB 117-2013

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used.

US ACT pass

 CA TB 117-2013

CERTIFICATES

ABRASION RESISTANCE

| Test | Condition | No. | Date | Download |
|-------------------------|-----------------------------|------------|-------------|---------------------|
| BS EN ISO 12947-2/14465 | In accordance with EN 14465 | 28512157-A | 03 Feb 2022 | PDF |

PILLING

| Test | Condition | No. | Date | Download |
|-------------------|-----------|------------|-------------|---------------------|
| BS EN ISO 12945-2 | | A 893562-2 | 10 Jan 2020 | PDF |

COLOUR FASTNESS TO LIGHT

| Test | Condition | No. | Date | Download |
|----------------------------|-----------|--------|-------------|---------------------|
| BS EN ISO 105 B02 Method 2 | | 189171 | 23 Mar 2017 | PDF |

DRY AND WET RUBBING/CROCKING

| Test | Condition | No. | Date | Download |
|------|-----------|-----|------|----------|
|------|-----------|-----|------|----------|



ABRASION RESISTANCE

| | | | |
|--------------------------------------|------------|----------------|---------------------|
| BS EN ISO 105-X12 Rubbing dry/wet | 2021AN2683 | 27 Jan 2022 | PDF |
|--------------------------------------|------------|----------------|---------------------|

FLAMMABILITY

| Test | Condition | No. | Date | Download |
|---------------------------------------|---|--------------|----------------|---------------------|
| BS EN 1021 1&2 Cigarette and Match | 35 kg/m3 CMHR foam | 23/58122-3-2 | 27 Jan 2021 | PDF |
| BS EN 1021-1 Cigarette | 20-22 kg/m3 non-fire retardant polyurethane foam | 23/58122-3-1 | 27 Jan 2021 | PDF |
| ÖNORM A3800-B2-B3825-Q1 UK | | 75986 | 23 Mar 2015 | PDF |
| NF P 92-503 M3 | | 367090705 | 02 Dec 2009 | PDF |
| CA TB 117-2013 | | 3-29635-0 | 26 Nov 2018 | PDF |

WASH STABILITY

| Test | Condition | No. | Date | Download |
|--------------------------------------|------------------|------------|----------------|---------------------|
| BS EN ISO 6330 2A 60C PC Flat Dry | | 28512157-A | 03 Feb 2022 | PDF |
| BS EN ISO 6330 3A 74C PC Flat Dry | | 82185-01 | 29 Jan 2017 | PDF |

COLOUR FASTNESS TO WATER SPOTTING

| Test | Condition | No. | Date | Download |
|-------------------|------------------|------------|----------------|---------------------|
| BS EN ISO 105-E16 | | 28511316 | 05 Mar 2021 | PDF |

VOC EMISSION

| Test | Condition | No. | Date | Download |
|--------------------------|------------------|-----------------------|----------------|---------------------|
| Ansi/Bifma VOC test M7.1 | | 392-2025- 00560701 | 02 Dec 2025 | PDF |

MATERIAL SAFETY DATA SHEET

| Test | Condition | No. | Date | Download |
|--|------------------|------------|-------------|---------------------|
|  Material Safety Data Sheet | | | 30 Sep | PDF |

ABRASION RESISTANCE

2021

CARE & MAINTENANCE

Wash or dry cleaning P(W)

Most stains can be removed by brushing with a suede brush or using an eraser.

Or use a solution of luke-warm water and a neutral detergent.

Click here for guidance relating to disinfection. [Link to Stain Guide...](#)



60°C shrinkage max 2.0%



74°C shrinkage max 2.5%

